


580gsm PVC Matt finish- 152 cm

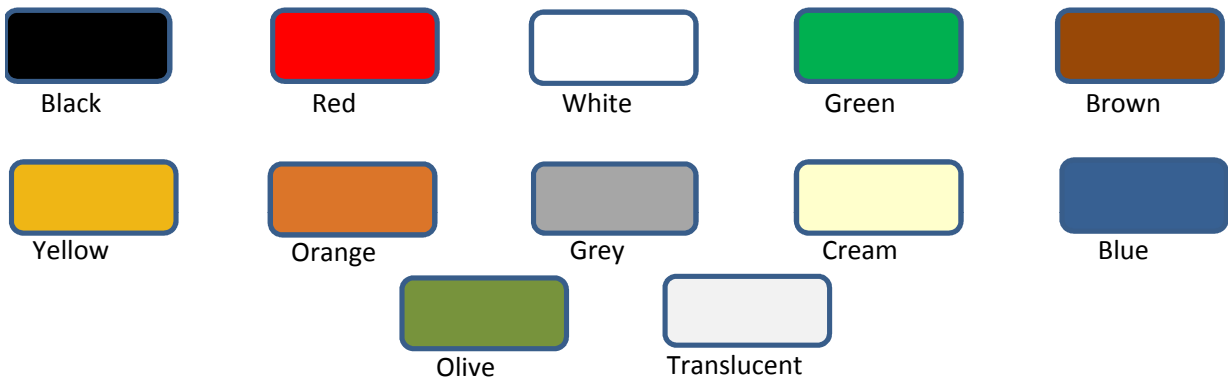

Base fabric: 500 Decitex, Woven polyester 77 gms
Coating: Laminate of Flexible PVC on each side of fabric
Total mass: 580 / 610 gsm
Finish: Matt
Roll length: 50m

Physical properties tested in accordance with BS 3424 "Methods of test for coated fabrics"

TENSILE STRENGTH: Warp 1000 N / 50mm Part 4, Method 6	Weft 1400 N / 50mm	FLAMIBILITY: Complies with BS5867 Part 2 Type A and B when Tested by BS5438
COATING ADHESION: 30N / 50mm Part 7 Method 9B		WATER PENETRATION: Minimum 1500 mm
COLD CRACK: Not higher than -25°C Part 8 Method 10A		CHEMICAL RESISTANCE: Generally Satisfactory
		FLEX RESISTANCE: 500,000 flexes minimum to meet Part 9 Method 11B requirements of ISO 7854 1984

These are typical results intended for guidance only
Conforms with BS3408/20

www.mitco.co.uk

tel. 0141 773 5469

fax. 0141 773 5455

email. info@mitco.co.uk