


610 gsm PVC Matt finish- 152 cm or 205 cm

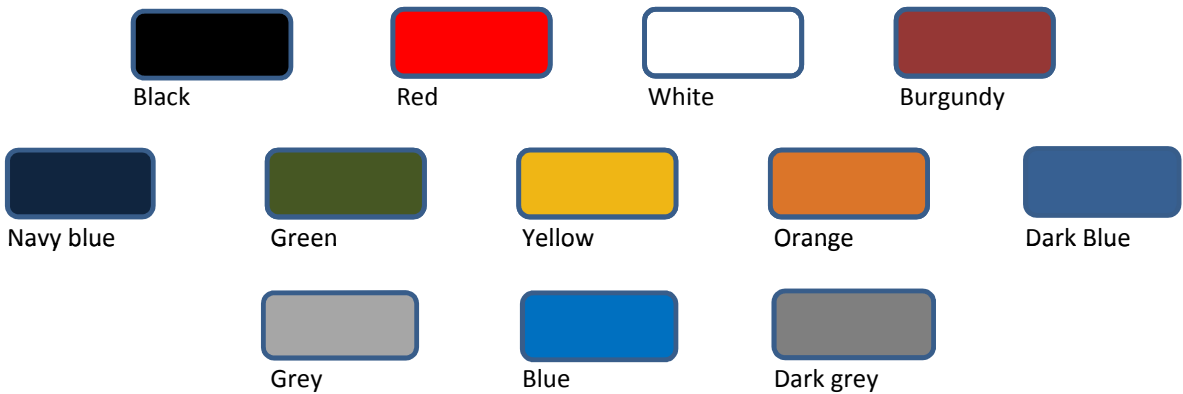

Base fabric: 1100 Decitex, Woven polyester 184 gms
Coating: Tough and flexible coating of polyvinyl chloride, both sides
Total mass: 610 gsm
Finish: Matt
Roll length: 50m

Physical properties tested in accordance with BS 3424 "Methods of test for coated fabrics"

TENSILE STRENGTH: Part 4, Method 6	Warp 2450 N / 50mm Weft 2000 N / 50mm	FUSION: Pass Part 22, Method 25A	
TEAR STRENGTH: Part 5 Method 7B	Across Warp 500N Across Weft 400N	WATER PENETRATION:	Minimum 1500 mm
COATING ADHESION: Part 7 Method 9B	120N / 50mm	CHEMICAL RESISTANCE:	Generally
COLD CRACK: Part 8 Method 10A	Not lower than -20°C	FLEX RESISTANCE: Part 9 Method 11B	500,000 flexes minimum to requirements of ISO 7854 1984

These are typical results intended for guidance only
Conforms with BS3408/20